



# Diesel Powered Trash Pumps



## QP2TK

2" Suction/Discharge • 172 GPM Flow • 85' Head  
Moves up to 1" solids • Kubota OC60-E4, 6 HP



## QP3TK

3" Suction/Discharge • 325 GPM Flow • 85' Head  
Moves up to 1.5" solids • Kubota OC60-E4, 6 HP



## QP4TK

4" Suction/Discharge • 475 GPM Flow • 85' Head  
Moves up to 2" solids • Kubota OC95-E4, 9.5 HP


MultiQuip offers a extensive line of diesel powered pipe-framed Trash Pumps in popular capacities. These models provide excellent pumping performance, Tier IV Final EPA/CARB certifications, and the convenience of electric start.

- **Trusted Diesel Power Systems** — pumps are driven by selected Kubota diesel engines with convenient electric start. All engines meet all EPA/CARB environmental requirements. Special shock mounted systems ensure that engine harmonics are dampened to the pump and pump frame.
- **Industrial Grade Pump Body** - unique die-cast, lightweight aluminum casings ensure the fastest priming times.
- **Specially Engineered Volute** — easily removable, double passage design ensures the fastest priming actions, minimal clogging, and improved flow efficiency.
- **Rugged Impeller** — the special balanced, multi-vane open designed impeller made from 45 ductile iron ensures the swift movement of heavy debris and greatly resists abrasion.
- **Pro Constructed Mechanical Seal System** — the silicon/carbon and Type 303 stainless steel assembly meets the rigorous demands of abrasion and high temperature operations.
- **Desirable Manifold Systems** — MultiQuip trash pumps provide both left and right discharge ports for operator convenience and flow flexibility.




# Trash Pump Performance Curves


### QP2TH

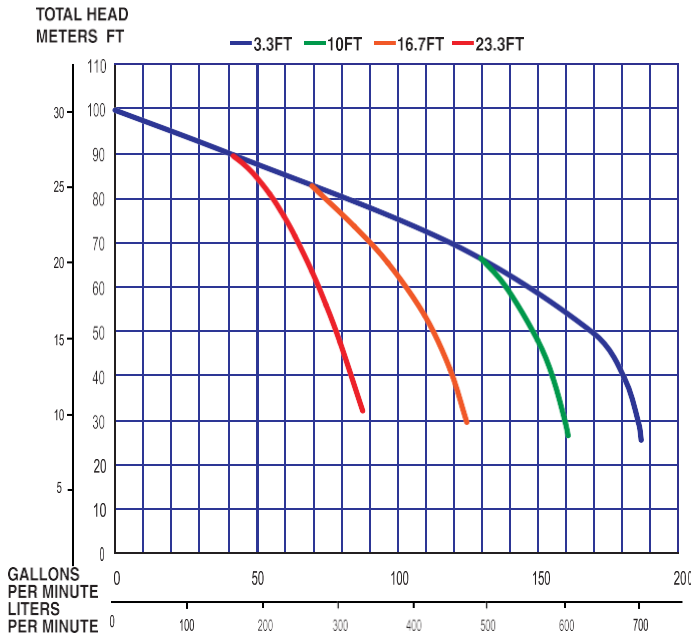


### QP2TK

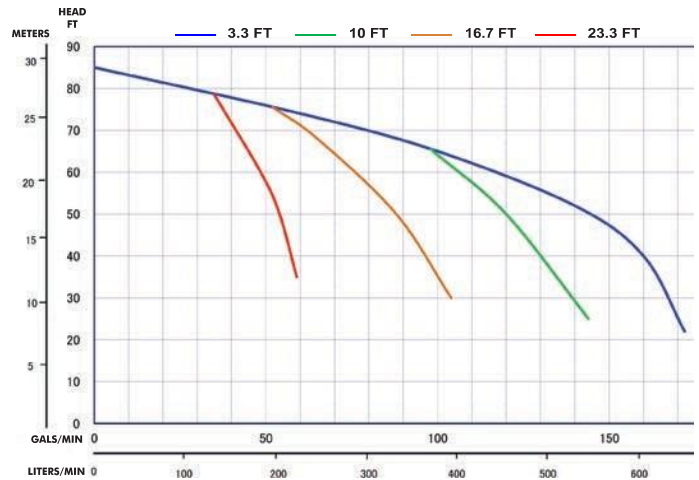

### QP3TH, QP3Ti, QP3TS, QP3THX

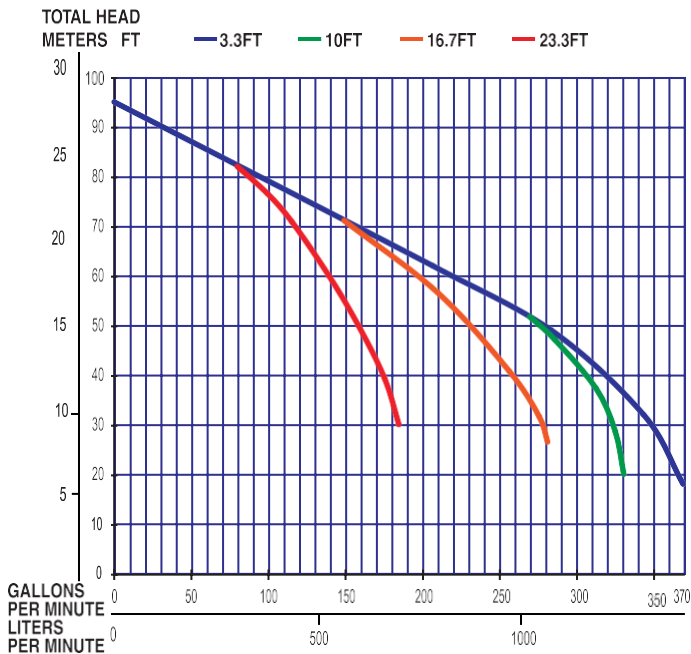

### QP3TK

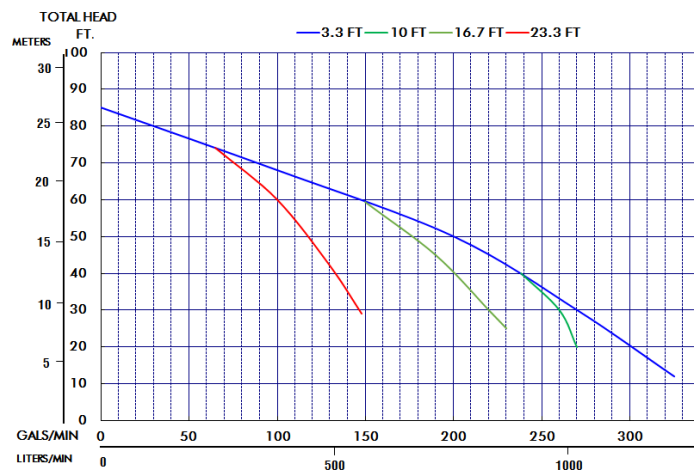


**Note** - The curve data represents the designed performance of the pump models, but does not take into account the many natural physical forces that act upon the pump in supporting the job. Contact MultiQuip for detailed guidance and pump calculations for your specific application.




# Trash Pump Performance Curves


### QP4TH

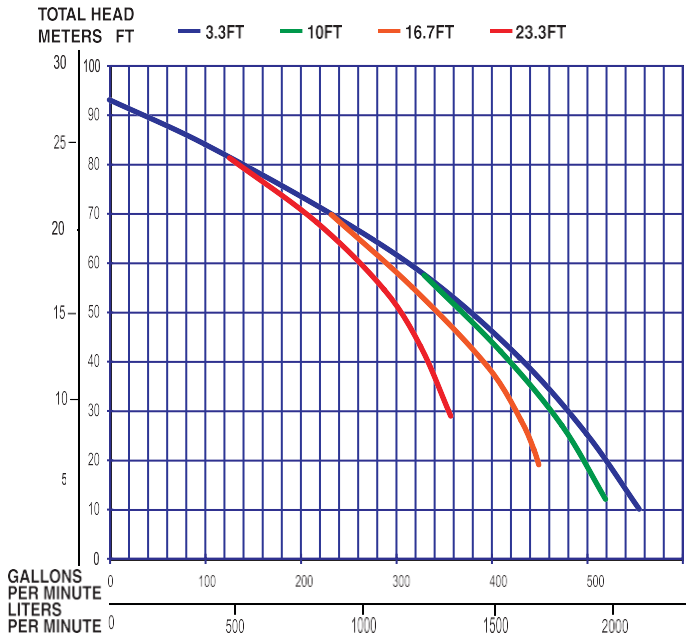


### QP4TK

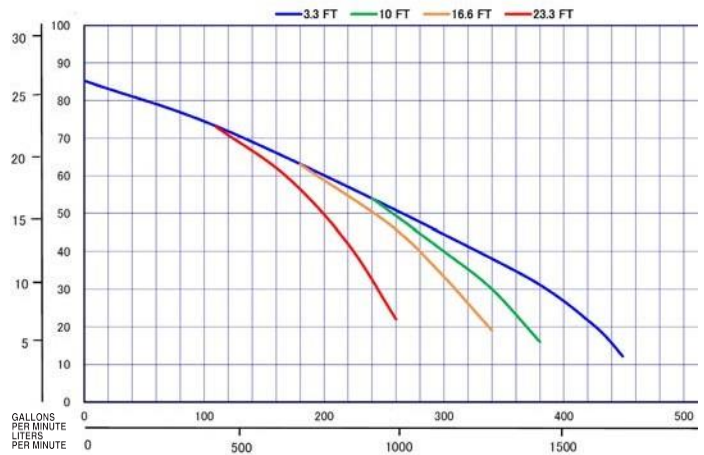

### MQ62K

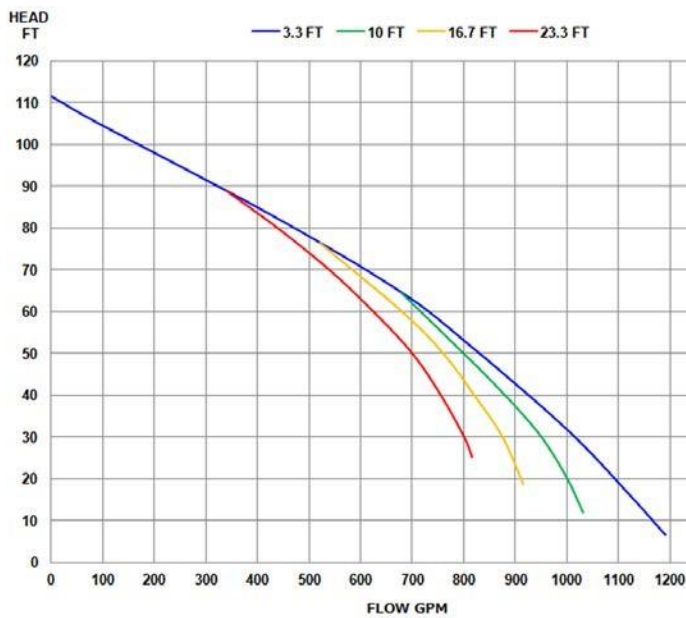

### MQ600H

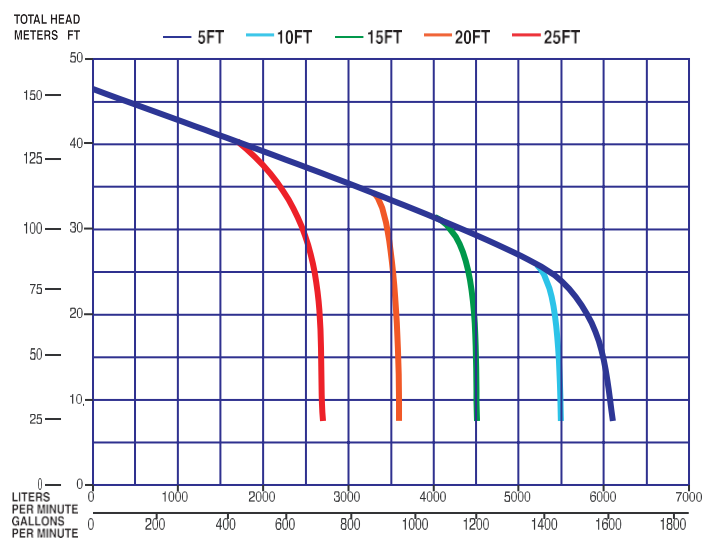

**Note** - The curve data represents the designed performance of the pump models, but does not take into account the many natural physical forces that act upon the pump in supporting the job. Contact MultiQuip for detailed guidance and pump calculations for your specific application.

# Trash Pump Specifications

Model	Suction x Discharge in.	Max Capacity GPM	Max Lift ft.	Max Head ft.	Max Pressure psi.	Max Solids in.	Engine	HP	Operating RPM	Oil Alarm	Fuel Capacity gal.	Fuel Rate gal.	Start Method	Wheel Kit Option	Dimensions inch	Dry Wt lbs.
<b>GASOLINE POWERED TRASH PUMPS</b>																
QP2TH	2 x 2	211	25	98	42.4	1	Honda GX160	4.8	3,600	Std.	0.83	0.46	Recoil	UWKB	27 x 18.5 x 20.5	96
QP3TH	3 x 3	39	2	9	41.1	1.5	Honda GX240	7.9	3,600	Std.	1.4	0.67	Recoil	UWKB	29 x 22 x 23	163
QP3Ti	3 x 3	39	25	95	41.1	1.5	Honda iGX270	8.5	3,600	Std.	1.4	0.7	Electric	Included	40 x 27 x 30	200
QP3THX	3 x 3	396	25	95	41.1	1.5	Honda GX240	7.9	3,600	Std.	4.2	0.67	Recoil	UWK4	30 x 23.5 x 23	188
QP3TS	3 x 3	396	25	95	41.1	1.5	Honda GX270	8.5	3,600	Std.	2.9	0.7	Electric	Included	32 x 31 x 30	287
QP4TH	4 x 4	555	25	90	40	2	Honda GX340	10.7	3,600	Std.	1.6	0.92	Recoil	UWK4	29 x 25 x 28	216
<b>DIESEL POWERED TRASH PUMPS</b>																
QP2TK	2 x 2	172	25	85	37.7	1	Kubota OC60-E4	6.0	3,600	n/a	0.95	0.41	Electric	UWKB	27 x 23.5 x 24	157
QP3TK	3 x 3	325	25	85	37.7	1.5	Kubota OC60-E4	6.0	3,600	n/a	0.95	0.41	Electric	UWKB	27 x 23.5 x 24	176
QP4TK	4 x 4	475	25	85	37.7	2	Kubota OC95-E4	9.5	3,600	n/a	1.45	0.63	Electric	UWK4	30.5 x 24.5 x 28.5	286
QP4TKT10	4 x 4	475	25	85	37.7	2	Kubota OC95-E4	9.5	3,600	n/a	1.45	0.63	Electric	n/a	92 x 53 x 67	615
QP4TKT16	4 x 4	475	25	85	37.7	2	Kubota OC95-E4	9.5	3,600	n/a	16	0.63	Electric	n/a	102 x 57 x 67	665
QP4TKT28	4 x 4	475	25	85	37.7	2	Kubota OC95-E4	9.5	3,600	n/a	28	0.63	Electric	n/a	102 x 57 x 67	735
MQ62TKS	6 x 6	1,190	25	111	48	3	Kohler KDW1404	24.3	2,700	Std.	28	1.85	Electric	Skid	80 x 23 x 44	1560
MQ62TKT	6 x 6	1,190	25	111	48	3	Kohler KDW1404	24.3	2,700	Std.	28	1.85	Electric	n/a	101 x 56 x 68	1960
MQ600H	6 x 6	1,600	25	150	64.9	3	Hatz 4H50TIC	68.4	2,000	Std.	40	1.76	Electric	Skid	80 x 39 x 49	2200
MQ600HTB	6 x 6	1,600	25	150	64.9	3	Hatz 4H50TIC	68.4	2,000	Std.	40	1.76	Electric	n/a	124 x 64 x 67	2850
MQ600HTP	6 x 6	1,600	25	150	64.9	3	Hatz 4H50TIC	68.4	2,000	Std.	40	1.76	Electric	n/a	124 x 64 x 67	2850

Note: Battery is included with the MQ600 pump models only.

## ACCESSORIES

	MODEL	DESCRIPTION
Suction Hoses	HS and HSQ series	2", 3", 4", and 6" diameter rigid PVC helix reinforced hose - NPT Thread and Cam/Groove Coupler
Discharge Hoses	HD and HDQ Series	2", 3", 4" and 6" diameter lay-flat synthetic PVC reinforced hose - NPT Thread and Cam/Groove Coupler
Wheel Kits	UWK Series	Wheel kits for pipe-frame pumps. 8" foam-filled tires, retractable handle, and necessary hardware for easy installation
Q/D Couplers	A200A, A300A, A400A, A600A	2", 3", 4" and 6" high quality Cam/Groove aluminium fittings that thread onto male NPT pump ports for quick-disconnect hose operations
Vacuum Testing Kit	7100031	Pump vacuum test gauge that easily affixes to 2", 3", 4" and 6" port to check pump casing pressure integrity

Your Multiquip dealer is:

Connect with us on

